




源胜达科技

YS91M2GR/YS70M2GR/YS74M2GR/YS75M2GR/YS76M3GR
YS91M2GR/YS70M2GR/YS74M2GR/YS75M2GR/YS76M3GR Three-phase three-wire output series

产品介绍

INTRODUCTION

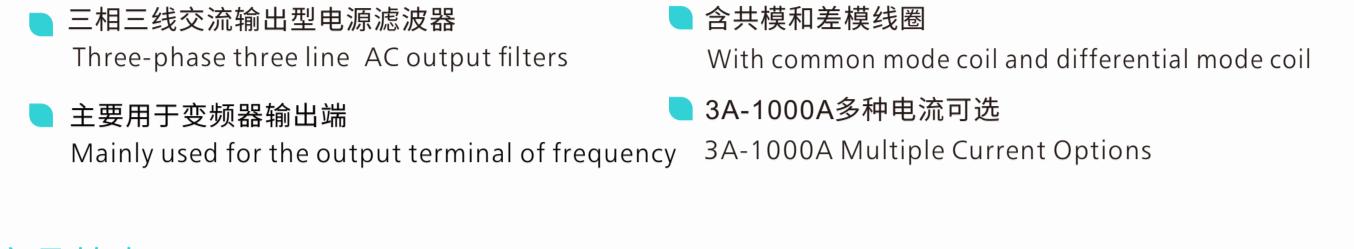

YS91M2GR--A YS70M2GR--A YS74M2GR--A YS75M2GR--A YS76M3GR--A

- 三相三线交流输出型电源滤波器
Three-phase three line AC output filters
- 主要用于变频器输出端
Mainly used for the output terminal of frequency

- 含共模和差模线圈
With common mode coil and differential mode coil
- 3A-1000A多种电流可选
3A-1000A Multiple Current Options

产品特点

FEATURE

■ YS76M3GR--A 小电流三极输出型滤波器 Low current three pole output filter	■ YS91M2GR--A 40~80A大电流双极输出型滤波器 40A~80A High current bipolar output filter
■ YS74M2GR--A 90~240A大电流双极输出型滤波器 90A~240A High current bipolar output filter	■ YS75M2GS--A 250A~500A超大电流双极输出型滤波器 250A~500A Super high current bipolar output filter
■ YS70M2GS--A 600~1000A超大电流双极输出型滤波器 600A~1000A Super high current bipolar output filter	

应用范围

APPLICATION

- 变频器
frequency changer/inverter
- 伺服电机
actuating motor
- 变频电源
variable-frequency power sources
- 各类变频原理设备
All kinds of frequency conversion principle equipment

技术参数

TECHNICAL DATA

- | | |
|--|------------------------------------|
| ■ 额定电压/ Rated Voltage: 115/250/380/440V AC | ■ 工作频率/ Working Frequency: 50/60Hz |
| ■ 额定电流/ Rated Current: 3-1000A | ■ 气候类型/ Climatic Czegoty: 25/85/21 |
| ■ 测试电压/ Working Frequency: 1500VDC (Line to Line) 2000V AC(Line to Ground) | |


产品列表

LIST

产品型号 Part No.	额定电流(A) Rate Current	泄露电流(mA) Leakage Current @250VAC 50Hz	电路图 Schematics	外形尺寸 Dimension	出线方式 Connection	安装方式 Installation	重量(g) Weigh	安规认证 Certification
YS76M3GR--A	3/6/10/20/30	<2.05	B28	A29		螺丝 Screw	2	CE RoHS
YS91M2GR--A	40/50/60/70/80	<2.05	B29	A51		螺丝 Screw	2.8	CE RoHS
YS74M2GR--A	90~240	<2.05	B29	A41		螺丝 Screw	3.9	CE RoHS
YS75M2GS--A	250~500	<2.05	B30	A44		螺丝 Screw	8.2	CE RoHS
YS70M2GS--A	600~1000	<2.05	B30	A52		螺丝 Screw	16	CE RoHS

外形尺寸(mm)

DIMENSION

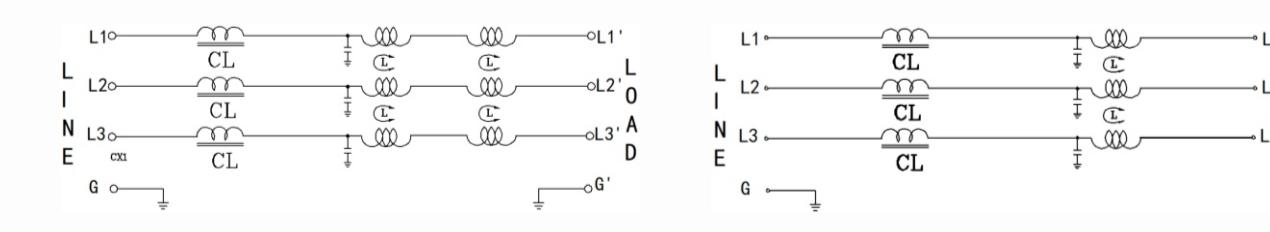

A29

A41

A44

A51

A52

专业电源滤波器制造商
Professional power filters from manufacturer